

PIPE JOINTS FOR HOT GASES




Publication No. CMR40/3, Issue Date: 08/2019

- A range of pipe joints for sealing gases at high temperatures and pressures
- Easy push fit assembly
- Accommodates up to 3½° misalignment
- Unrestricted rotational and axial movement
- Rings made from Haynes® 25 corrosion resisting alloy
- Bore surface coated with Tribomet® T 104C Chrome Carbide/Cobalt composite coating developed and patented by BAJ Ltd
- Typical operating conditions:- Pressure 16.67 bar (250 p.s.i.) Temperature 650°C (1200°F)


Typical Dimensions (Inches)

"A" Nominal Pipe Dia.		B	C	D	E
OVER	UP TO				
.500	.700	.420	.100	.220	.040
.700	1.000	.420	.100	.220	.055
1.000	1.400	.420	.100	.220	.070
1.400	2.000	.468	.100	.268	.098
2.000	2.800	.528	.100	.328	.130
2.800	4.000	.613	.100	.363	.185
4.000	5.500	.760	.100	.510	.245

Anti fret bearing ring Piston sealing ring pack

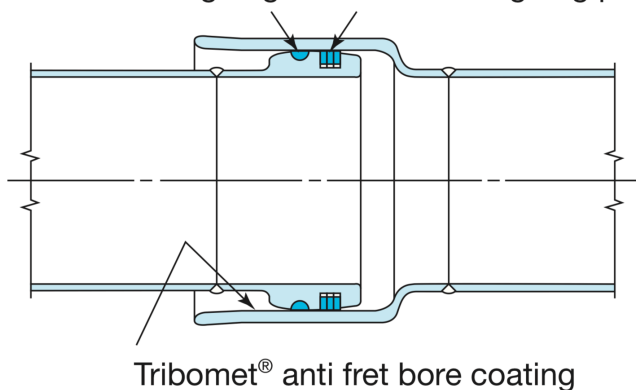

AS9100, Rev D
ISO9001: 2015
ISO14001: 2015

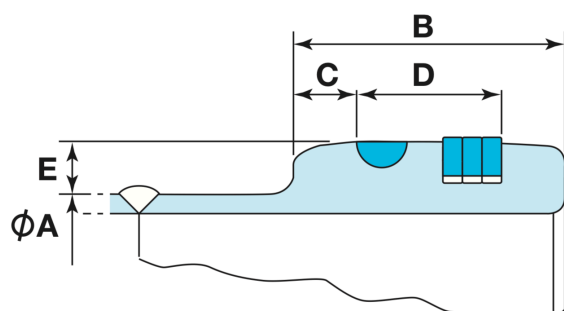

Cross Manufacturing Company (1938) Ltd.

Head Office,
Midford Road,
Bath,
BA2 5RR,
England

Tel: +44 (0) 1225 837000
Fax: +44 (0) 1225 834115

mail@crossmanufacturing.com
www.crossmanufacturing.com